


YF360A-2/SA2



Applicable camera (model) 1 2/3 1/2 1/3 1/4

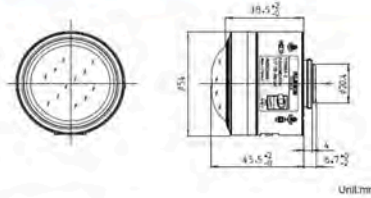

- Features**
- 360° view eliminates blind spots
 - Optimized design for VGA to 2 Megapixel sensors both analog and IP cameras
 - Standard CS Metal Mount for 1/3" sensors
 - Equipped with 3 axes sensor centering adjustment
 - ImmerVision Enables® SDK available for DVR/NVR/VMS integration
 - Patented panomorph optical technology



	Applicable to 1/3	Applicable to 1/3
	YF360A-2	YF360A-SA2
Focal length in mm	0.9 (short axis) / 1.15 (long axis)	0.9 (short axis) / 1.15 (long axis)
Iris range	F1.9 (short axis) / F2.4 (long axis)	F1.9 (short axis) / F2.4 (long axis)
Operation	manual	manual
Focus	none (open iris)	Auto (DC type) *
Iris	182° x 182°	182° x 182°
Angle of view (H x V)	1.3 (4:3)	1.3 (4:3)
Anamorphic ratio	infinity ~ 20 mm	infinity ~ 20 mm
Focusing range (from front of the lens)	CS	CS
Mount	180	180
Mass in g		
Remarks	ImmerVision Enables RPLA0NKV	

*1: The iris automatically closes when the camera is turned off.

FUJIFILM Europe GmbH

Heesenstr. 31, 40549 Düsseldorf, Germany
 Tel.: +49 211-50 89 0, Fax: +49 211-50 89 89 00
 www.fujifilm.eu/fujinon, cctv@fujifilm.eu