

## DS-2CD2346G3D-IZ2UY/S(L)(RB) 4 MP Dual-lens Fixed point zoom Turret Network Camera

Powered by

**DarkFighter**



AcuSense 3.0



- 2 independent channels, 1 wiring, 1 IP
- 2.8/4 mm in one camera, point vari-focal
- Innovative interpolated design, highly waterproof and user-friendly
- Excellent low illumination performance via Powered by DarkFighter
- Active strobe light and audio alarm to warn intruders off
- Anti-corrosion design (NEMA 4X), more reliable
- Crystal-clear audio with Arrayed Dual-Mic
- Person and vehicle classification based on deep learning

## ▪ Specification

Camera	
Image Sensor	Channel 1: 1/3" Progressive Scan CMOS, Channel 2: 1/3" Progressive Scan CMOS
Max. Resolution	Channel 1: 2688 × 1520, Channel 2: 2688 × 1520
Min. Illumination	Channel 1: Color: 0.001 Lux @ (F1.6, AGC ON), 0 Lux with IR, Channel 2: Color: 0.001 Lux @ (F1.6, AGC ON), 0 Lux with IR
Shutter Time	1/3 s to 1/100,000 s
Day & Night	Channel 1: IR cut filter, Channel 2: IR cut filter
Angle Adjustment	Channel 1: Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360°, Channel 2: Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360°
Lens	
Lens Type	Channel 1: Varifocal lens, motorized lens, 2.8mm and 4mm    Channel 2: Varifocal lens, motorized lens, 2.8mm and 4mm
Focal Length & FOV	Channel 1: 2.8 mm, horizontal FOV 99.3°, vertical FOV 52.9°, diagonal FOV 120.2° 4 mm, horizontal FOV 80.0°, vertical FOV 44.1°, diagonal FOV 94.0° Channel 2: 2.8 mm, horizontal FOV 99.3°, vertical FOV 52.9°, diagonal FOV 120.2° 4 mm, horizontal FOV 80.0°, vertical FOV 44.1°, diagonal FOV 94.0°
Lens Mount	Ø14
Iris Type	Fixed
Aperture	F1.6
Depth of Field	2.8 mm: 1.2 m to ∞ 4 mm: 1.5 m to ∞
DORI	
DORI	Channel 1: 2.8 mm, D: 66.6 m, O: 26.4 m, R: 13.3 m, I: 6.7 m 4 mm, D: 79.2 m, O: 31.4 m, R: 15.8 m, I: 7.9 m Channel 2: 2.8 mm, D: 66.6 m, O: 26.4 m, R: 13.3 m, I: 6.7 m 4 mm, D: 79.2 m, O: 31.4 m, R: 15.8 m, I: 7.9 m
Illuminator	
Supplement Light Type	IR
Supplement Light Range	Up to 30 m
Smart Supplement Light	Yes
IR Wavelength	850 nm
Video	
Main Stream	Channel 1 & Channel 2: 50 Hz: 25 fps (2688 × 1520, 1920 × 1080, 1280 × 720) 60 Hz: 30 fps (2688 × 1520, 1920 × 1080, 1280 × 720)

Sub-Stream	Channel 1 & Channel 2: 50 Hz: 25 fps (768 × 432, 640 × 360) 60 Hz: 30 fps (768 × 432, 640 × 360)
Third Stream	Channel 1 & Channel 2: 50 Hz: 1 fps (1920 × 1080, 1280 × 720, 640 × 480, 640 × 360) 60 Hz: 1 fps (1920 × 1080, 1280 × 720, 640 × 480, 640 × 360) *Third stream is supported under certain settings.
Video Compression	Main stream: H.265/H.264/H.264+/H.265+, Sub-stream: H.265/H.264/MJPEG, Third stream: H.265/H.264, *Third stream is supported under certain settings.
Video Bit Rate	32 Kbps to 16 Mbps
H.264 Type	Baseline Profile, Main Profile, High Profile
H.265 Type	Main Profile
Scalable Video Coding (SVC)	H.264 and H.265 encoding
Bit Rate Control	CBR, VBR
Region of Interest (ROI)	1 fixed region for main stream and sub-stream and third stream
Target Cropping	Yes
<b>Audio</b>	
Audio Compression	G.711/G.722.1/G.726/MP2L2/PCM/MP3/AAC-LC
Audio Bit Rate	64 Kbps (G.711ulaw/G.711alaw)/16 Kbps (G.722.1)/16 Kbps (G.726)/32 to 192 Kbps (MP2L2)/8 to 320 Kbps (MP3)/16 to 64 Kbps (AAC-LC)
Audio Sampling Rate	8 kHz/16 kHz/32 kHz/48 kHz
Environment Noise Filtering	Yes
<b>Network</b>	
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, IGMP, 802.1X, QoS, IPv4, IPv6, UDP, Bonjour, SSL/TLS, PPPoE, SNMP, WebSocket, WebSockets
Simultaneous Live View	Up to 6 channels
API	ONVIF (Profile S, Profile G), ISAPI, SDK, ISUP
User/Host	Up to 32 users 3 user levels: administrator, operator, and user
Security	Password protection, complicated password, HTTPS encryption, IP address filter, Security Audit Log, basic and digest authentication for HTTP/HTTPS, TLS 1.1/1.2/1.3, WSSE and digest authentication for Open Network Video Interface
Network Storage	NAS (NFS, SMB/CIFS), Auto Network Replenishment (ANR), Together with high-end Hikvision memory card, memory card encryption and health detection are supported.
Client	iVMS-4200, Hik-Connect, Hik-Central
Web Browser	Plug-in free live view: Chrome 80+, Firefox 80+, Edge 89+, Safari 13+, Local service: Chrome 80+, Firefox 80+, Edge 89+, Safari 13+
<b>Image</b>	
Image Parameters Switch	Yes
Day/Night Switch	Day, Night, Auto, Schedule
Image Settings	Rotate mode
Wide Dynamic Range (WDR)	120 dB


SNR	≥ 52 dB
Image Enhancement	BLC, HLC, 3D DNR
Privacy Mask	8 programmable polygon privacy masks
<b>Interface</b>	
Ethernet Interface	1 RJ45 10 M/100 M self-adaptive Ethernet port
On-Board Storage	Built-in memory card slot, support microSD/microSDHC/microSDXC card, up to 512 GB
Reset Key	Yes
Built-in Speaker	1 built-in speaker, Max. power consumption: 1.5 W, max. sound pressure level: 10 cm: 110 dB.
Audio	Built-in Microphone: Arrayed dual-microphone
<b>Event</b>	
Basic Event	Motion detection (support alarm triggering by specified target types (human and vehicle)), video tampering alarm, exception
Linkage	Upload to FTP/NAS/memory card, notify surveillance center, send email, trigger recording, trigger capture, audible warning, strobe light flashing
<b>Deep Learning Function</b>	
Perimeter Protection	Line crossing, intrusion, region entrance, region exiting Support alarm triggering by specified target types (human and vehicle)
<b>General</b>	
Power	12 VDC ± 25%, 1.42 A, max. 17 W, two-core terminal block, reverse polarity protection, PoE: IEEE 802.3at, Class 4, max. 18 W
Material	Metal
Dimension	199.9 mm × 120.1 mm × 97.2 mm (7.9" × 4.7" × 3.8")
Package Dimension	305 mm × 162 mm × 165 mm (12.0" × 6.4" × 6.5")
Weight	Approx. 1200 g (2.6 lb.)
With Package Weight	Approx. 1567 g (3.5 lb.)
Storage Conditions	-30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)
Startup and Operating Conditions	-30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)
Language	33 languages: English, Russian, Estonian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenian, Serbian, Turkish, Korean, Traditional Chinese, Thai, Vietnamese, Japanese, Latvian, Lithuanian, Portuguese (Brazil), Ukrainian
General Function	Heartbeat, mirror, flash log, password reset via email, pixel counter, anti-banding
Flashing Light	-SRB: Red and Blue Light -SL: White Light
<b>Approval</b>	
EMC	CE-EMC: EN 55032:2015+A1:2020, EN 50130-4:2011+A1:2014, EN IEC 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, IC: ICES-003: Issue 7, KC: KN32: 2015, KN35: 2015
Safety	CB: IEC 62368-1:2014+A11, CE-LVD: EN 62368-1:2014/A11: 2017

Environment	CE-RoHS: 2011/65/EU, WEEE: 2012/19/EU, Reach: Regulation (EC) No 1907/2006, NEMA 4X (NEMA 250-2018)
Protection	IP67: IEC 60529-2013

**▪ Available Model**

- DS-2CD2346G3D-IZ2UY/SL(2.8/4mm)
- DS-2CD2346G3D-IZ2UY/SRB(2.8/4mm)
- DS-2CD2346G3D-IZ2UY/SL(2.8/4mm)(BLACK)
- DS-2CD2346G3D-IZ2UY/SRB(2.8/4mm)(BLACK)

**▪ Dimension**

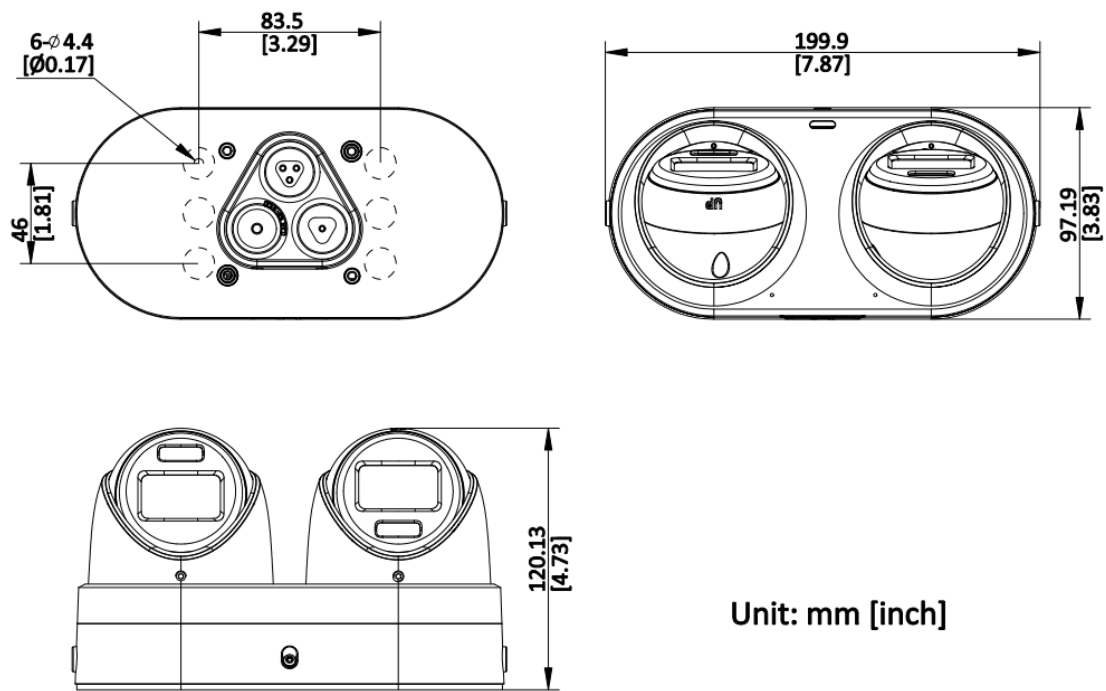

Unit: mm [inch]


**▪ Accessory**

**▪ Optional**

DS-1618ZJ-Y	DS-1475ZJ-Y	DS-1476ZJ-Y	DS-1663ZJ-Y	DS-1661ZJ-Y
				

**▪ Installation Methods**

Wall Mounting	Vertical Pole Mounting	Corner Mounting	Pendant Mounting	Pendant Mounting
DS-1618ZJ-Y+DS-4274	DS-1475ZJ-Y	DS-1476ZJ-Y	DS-1663ZJ-Y+DS-4274	DS-1661ZJ-Y+DS-4274
ZJ-MD4-WAY			ZJ-MD4-WAY	ZJ-MD4-WAY

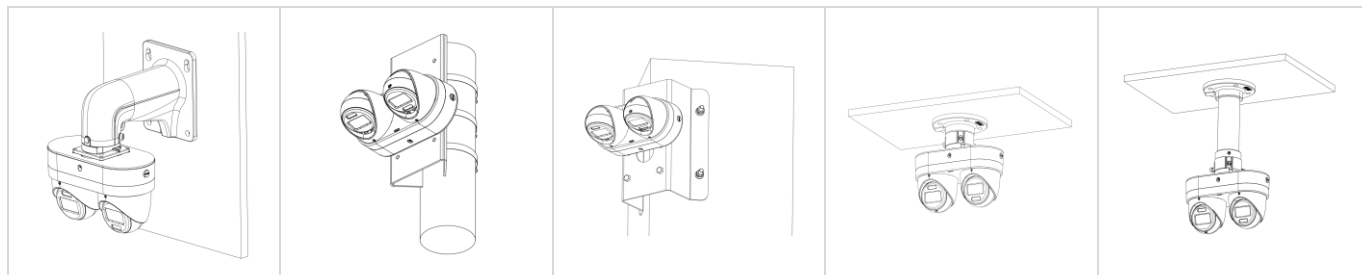

See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

